

SEGA
TILES

CATALOGUE 2024

MARBLEX
experience style with strength!

1200 x 1800 mm

FULLBODY
POLISHED
VITRIFIED
SLAB

SEGA
TILES

DIOR WHITE



MARBLEX
experience style with strength!

1200 x
1800 mm

FULLBODY
POLISHED
VITRIFIED
SLAB

SEGA
TILES

DIOR CREMA



MARBLEX
experience style with strength!

1200 x
1800 mm

FULLBODY
POLISHED
VITRIFIED
SLAB

SEGA
TILES

PRADA WHITE



MARBLEX
experience style with strength!

1200 x
1800 mm

FULLBODY
POLISHED
VITRIFIED
SLAB

SEGA
TILES

PRADA CREMA




MARBLEX
experience style with strength!

1200 x
1800 mm

POLISHED
VITRIFIED
SLAB

SEGA
TILES

EVEREST WHITE

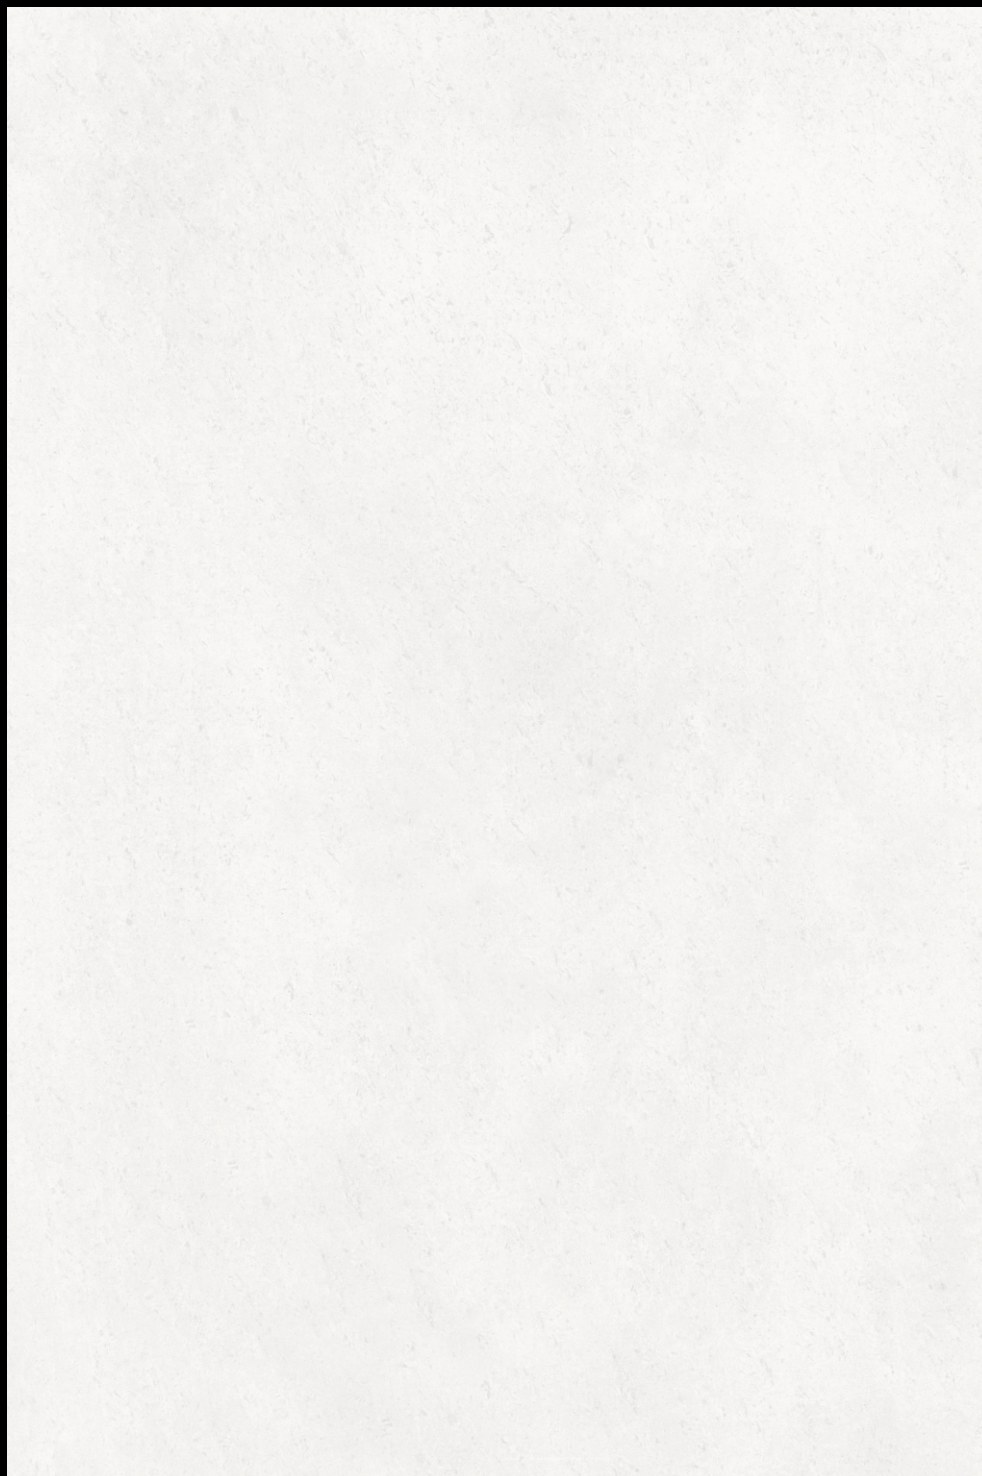


MARBLEX
experience style with strength!

1200 x
1800 mm

POLISHED
VITRIFIED
SLAB

SEGA
TILES

TITAN WHITE

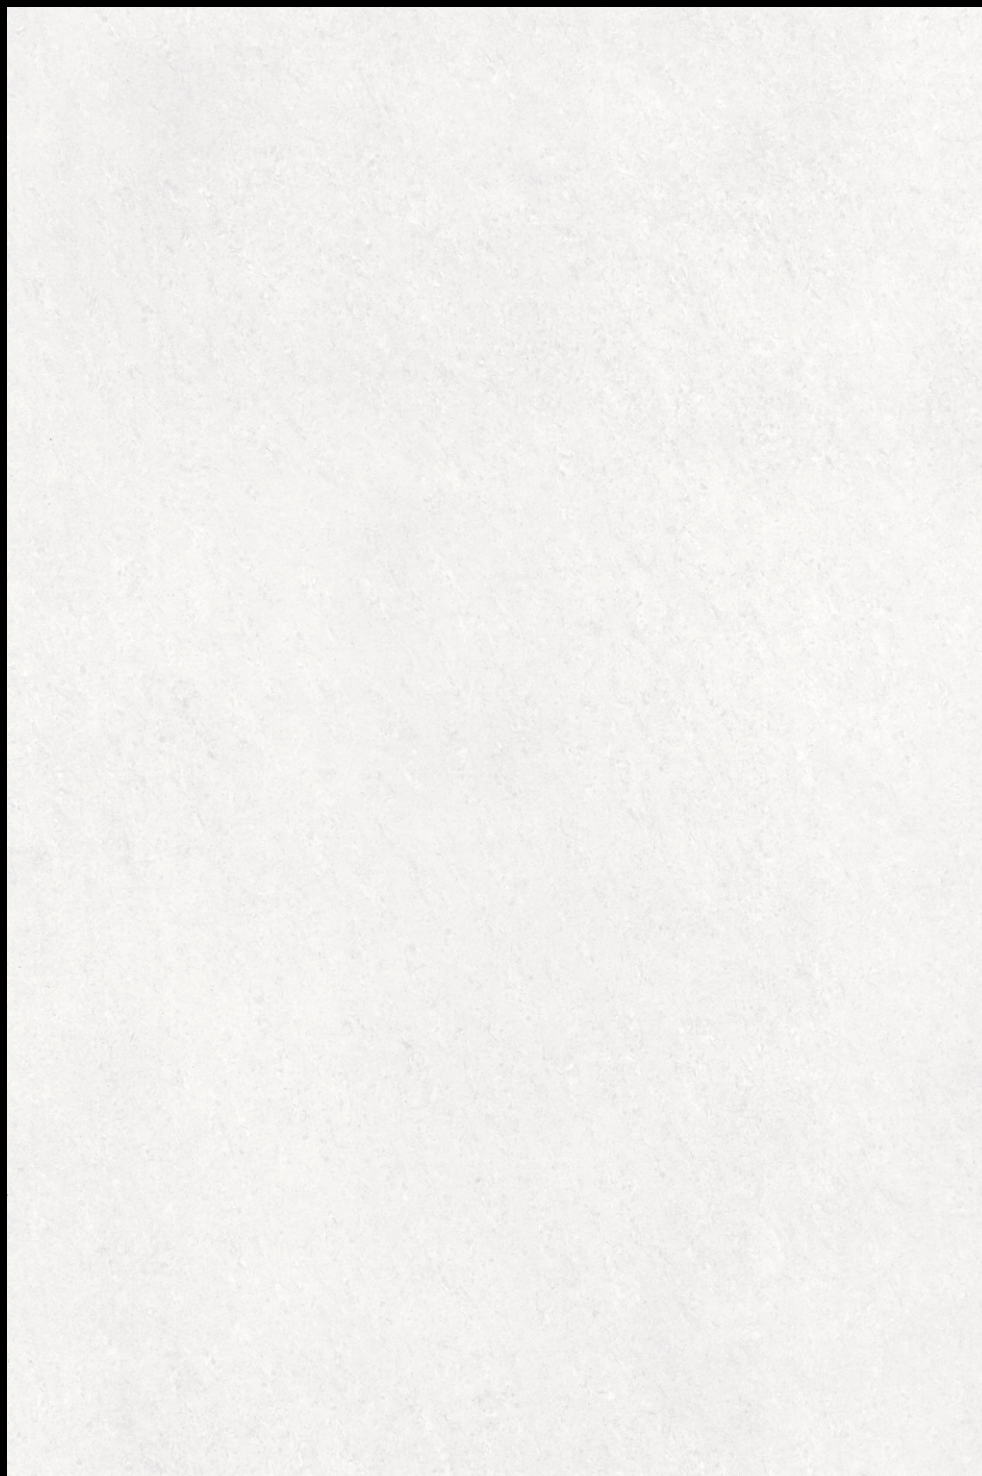


MARBLEX
experience style with strength!

1200 x
1800 mm

POLISHED
VITRIFIED
SLAB

SEGA
TILES

TITAN CREMA

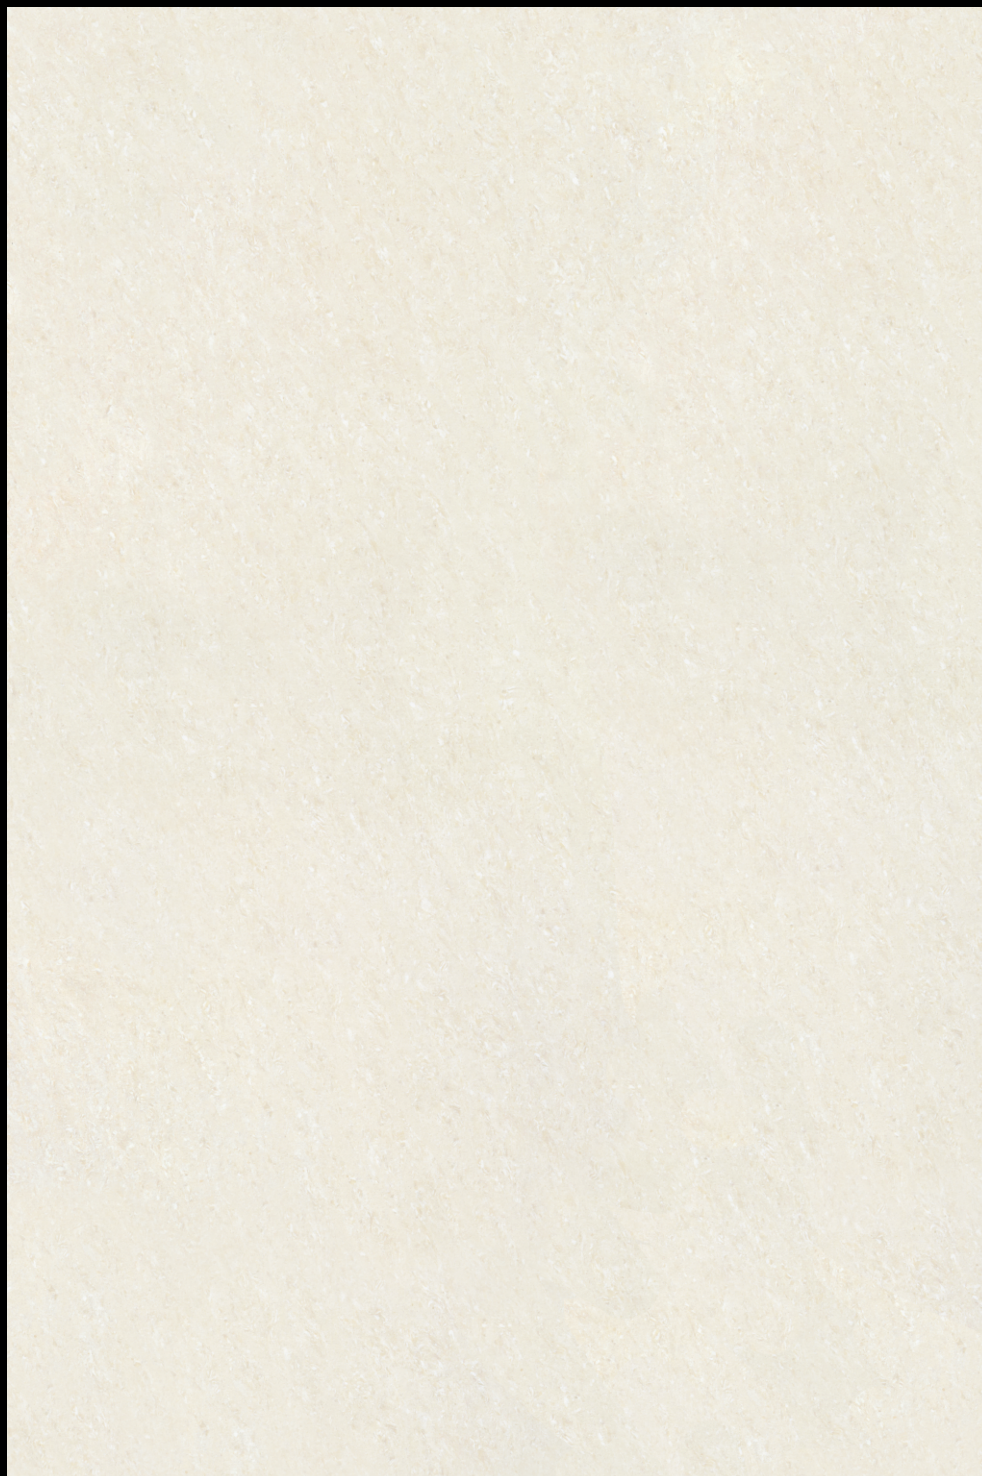

MARBLEX
experience style with strength!

1200 x
1800 mm

POLISHED
VITRIFIED
SLAB

SEGA
TILES

TITAN MUSTURD




MARBLEX
experience style with strength!

1200 x
1800 mm

POLISHED
VITRIFIED
SLAB

SEGA
TILES

ALEXA WHITE

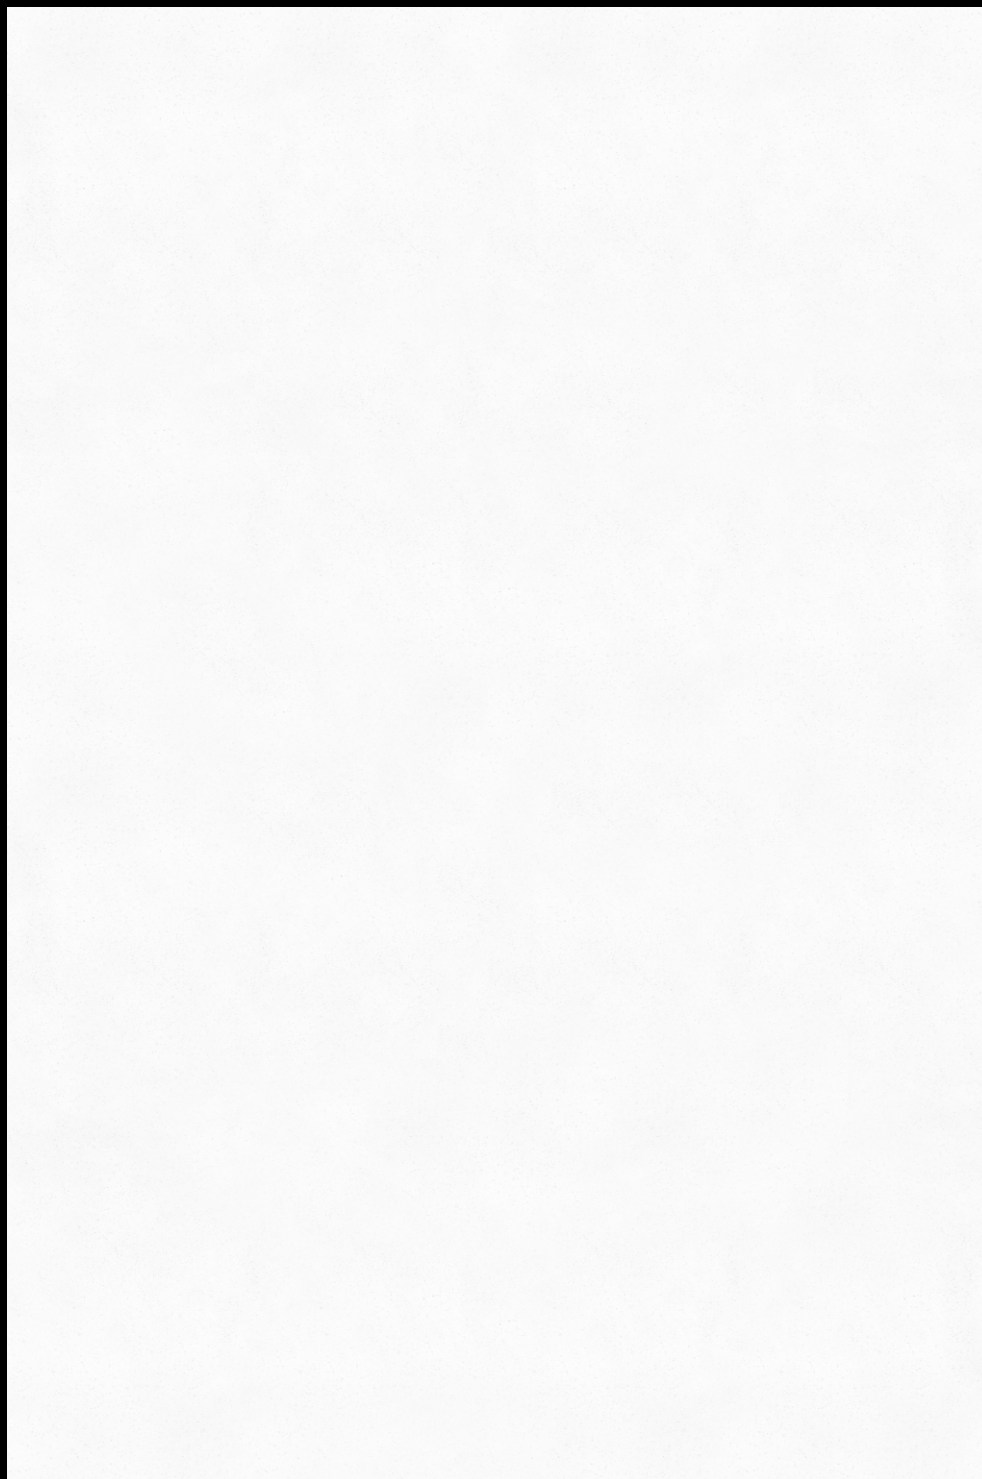

MARBLEX
experience style with strength!

1200 x
1800 mm

The
Ultimate
Double Charge Collection

SEGA
TILES

MARBLÉX
experience style with strength!

1200x1800mm

Galassia
SERIES

800x1600mm

POLARIS

1000x1000mm


Quantum
Series
600x1200mm

POLARIS

800x800mm

Syton
REFINED THE LUXURY

600x1200mm
FULLBODY

CLICK ICON TO VISIT OUR COLLECTION

TECHNICAL SPECIFICATION

Sr. No.	CHARACTERISTICS	STANDARD AS PER IS 15622:2006 GROUP BIA	OUR VALUE	TEST METHOD
REGULATORY PROPERTIES				
01	Deviation in length & width	± 0.5%	± 0.1%	ISO-10545-2
02	Deviation in thickness	± 5.0%	± 2.0%	ISO-10545-2
03	Straightness of sides	± 0.5%	± 0.1%	ISO-10545-2
04	Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
05	Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
06	Colour difference	Unaltered	No Change	ISO-10545-16
07	Glossiness	As per manufacturer	Min 70%	Glossometer
STRUCTURAL PROPERTIES				
01	Water Absorption	< 0.5%	< 0.05 %	ISO-10545-3
02	Apparent density	> 2.0 gm/cc	> 2.28 gm/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
01	Flexural modulus or rupture	Min 35 N/mm ²	Min 40 N/mm ²	ISO-10545-4
02	Flexural breaking strength	Min 1300 N	Min.2000 N	ISO-10545-4
03	Impact resistance	As per manufacturer	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
01	Deep abrasion resistance	Max 175mm ³	Max 132mm ³	ISO-10545-6
02	Moh's hardness	Min 6	8 ⁺	EN 101
THERMOHYDROMETRIC PROPERTIES				
01	Frost resistance	No Damage	Frost proof	ISO-10545-12
02	Thermal shock resistance	No Damage	No Damage	ISO-10545-9
03	Moisture expansion	Nil	Nil	ISO-10545-10
04	Thermal Expansion	Max 9.0x10 ⁻⁶	Max 6.5x10 ⁻⁶	ISO-10545-8
CHEMICAL PROPERTIES				
01	Chemical resistance	No Damage	No Damage	ISO-10545-13
02	Satin resistance	Resistance	Resistance	ISO-10545-14
SAFETY PROPERTIES				
01	Slip resistance (friction co efficient)	> 0.40	> 0.40	ISO-10545-17

PACKING DETAILS

TILE SIZE	THICKNESS	TILES / BOX	WEIGHT / BOX	COVERAGE AREA / BOX	COVERAGE AREA / BOX
1200x1800mm	10mm(Approx)	2 Pcs.	95 Kg.(Approx)	46.5 Sq. Ft.	4.32 Sq. Mtr.



SEGA GRANITO LLP.

Morbi-Halvad Highway, At. Nichimandal,
Morbi - 363 642, (Guj.) INDIA.

Customer Care : +91 75750 75075
E-mail : info@segatiles.com

www.segatiles.com